

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- Medium Power Transistor

SOT-23

MARKING

593




PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-23	3K	7 inch

ORDER INFORMATION

Part Number	Type
MMBT593-C	Lead (Pb)-free and Halogen-free



ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Collector-Base Voltage	V_{CBO}	-120	V
Collector-Emitter Voltage	V_{CEO}	-100	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-1	A
Collector Current Dissipation	P_C	250	mW
Thermal Resistance from Junction-Ambient	$R_{\theta JA}$	500	$^\circ\text{C/W}$
Junction and Storage Temperature Range	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$









ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-120	-	-	V	$I_C = -100\mu\text{A}, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-100	-	-	V	$I_C = -10\text{mA}, I_B = 0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -100\mu\text{A}, I_C = 0$
Collector Cut-off Current	I_{CBO}	-	-	-0.1	μA	$V_{CB} = -100\text{V}, I_E = 0$
Collector Cut-off Current	I_{CES}	-	-	-0.1		$V_{CE} = -100\text{V}, I_E = 0$
Emitter Cut-off Current	I_{EBO}	-	-	-0.1		$V_{EB} = -4\text{V}, I_C = 0$
DC Current Gain ¹	h_{FE}	100	-	-	-	$I_C = -1\text{mA}, V_{CE} = -5\text{V}$
		100	-	-		$I_C = -250\text{mA}, V_{CE} = -5\text{V}$
		100	-	300		$I_C = -0.5\text{A}, V_{CE} = -5\text{V}$
		50	-	-		$I_C = -1\text{A}, V_{CE} = -5\text{V}$
Collector-Emitter Saturation Voltage ¹	$V_{CE(sat)}$	-	-	-0.2	V	$I_C = -250\text{mA}, I_B = -25\text{mA}$
		-	-	-0.3		$I_C = -500\text{mA}, I_B = -50\text{mA}$
Base-Emitter Saturation Voltage ¹	$V_{BE(sat)}$	-	-	-1.1	V	$I_C = -500\text{mA}, I_B = -50\text{mA}$
Base-Emitter Voltage ¹	$V_{BE(on)}$	-	-	-1		$V_{CE} = -5\text{V}, I_C = -1\text{mA}$
Transition Frequency	f_T	50	-	-	MHz	$V_{CE} = -10\text{V}, I_C = -50\text{mA}, f = 100\text{MHz}$
Collector Output Capacitance	C_{ob}	-	5	-	pF	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$

Note:


1. Pulse test: Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

CHARACTERISTICS CURVE

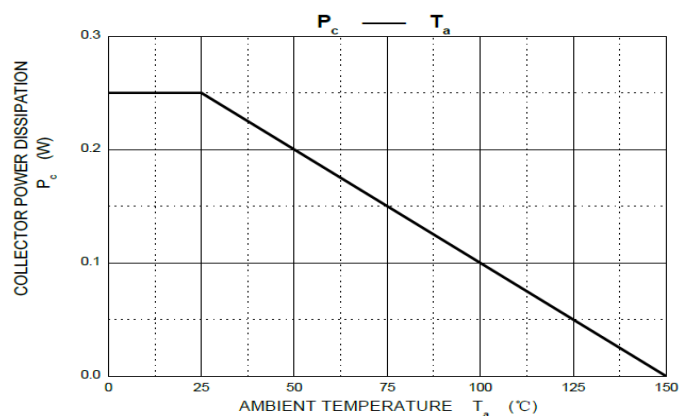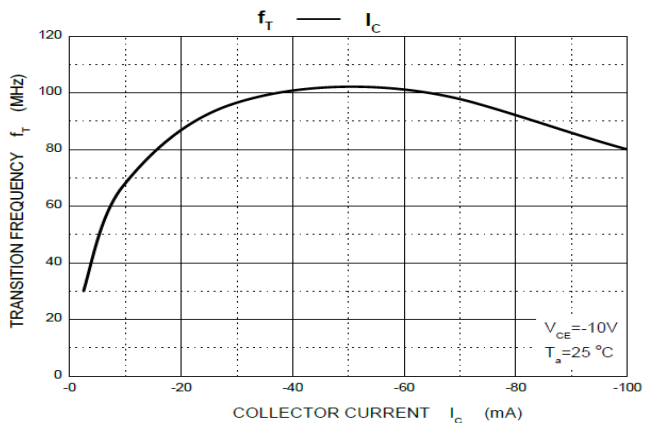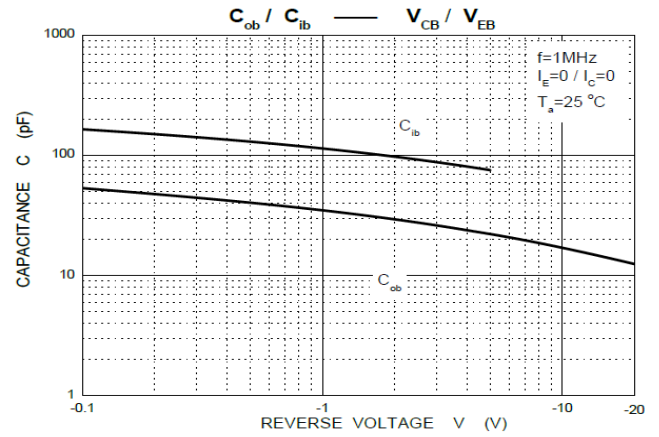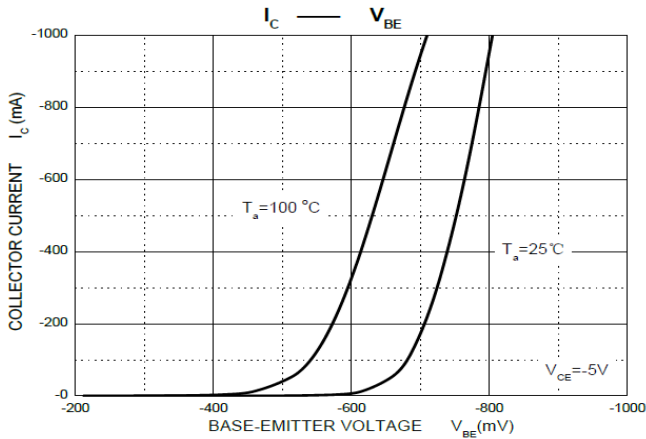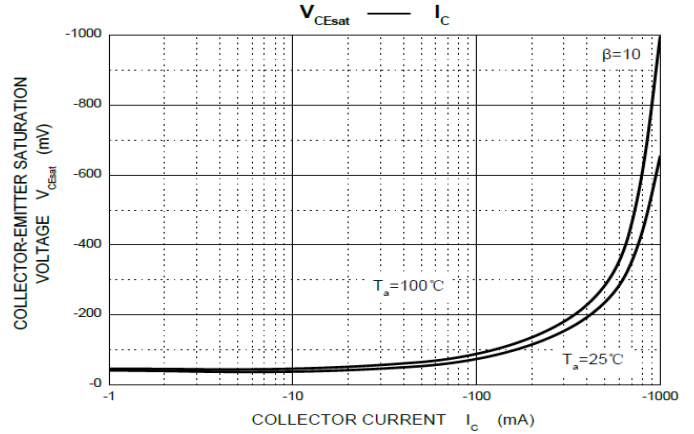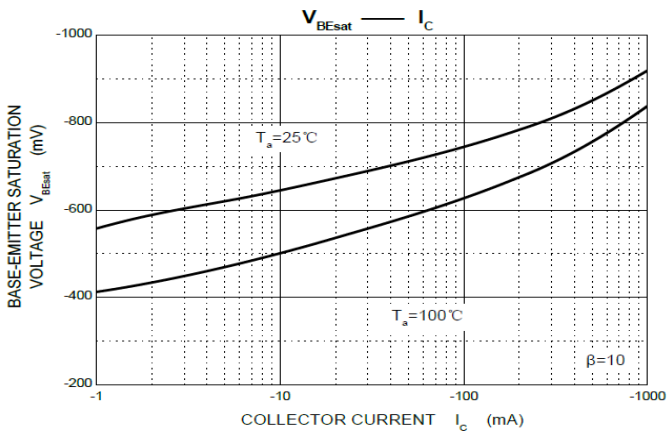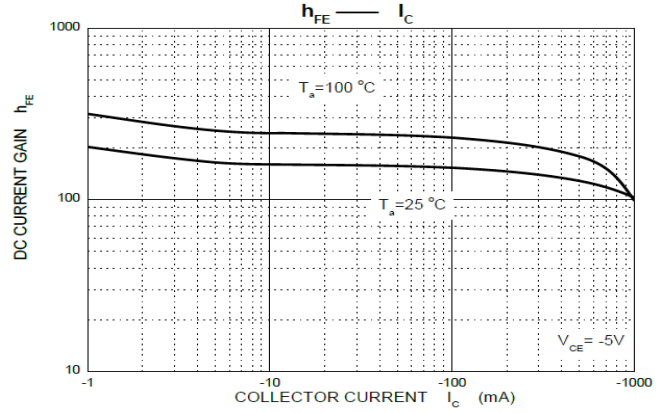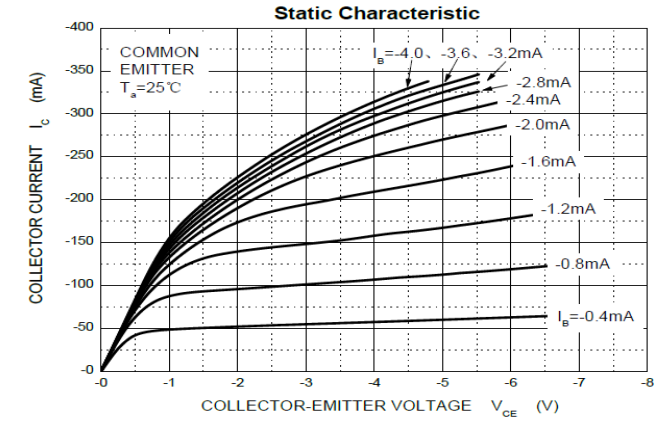

PACKAGE OUTLINE DIMENSIONS


SOT-23

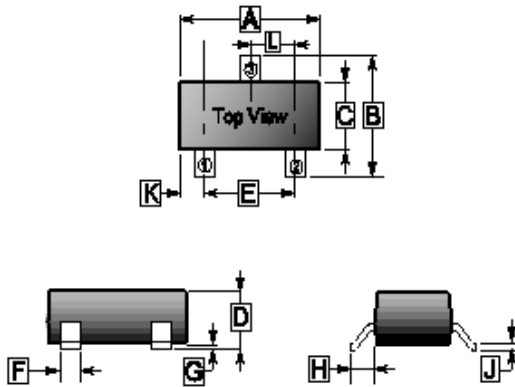

REF.	Millimeter	
	Min.	Max.
A	2.65	3.10
B	2.10	3.00
C	1.10	1.80
D	0.89	1.40
E	1.70	2.30
F	0.28	0.55
G	-	0.18
H	0.55 REF.	
J	0.05	0.26
K	0.60 REF.	
L	0.95 TYP.	

MOUNTING PAD LAYOUT

SOT-23

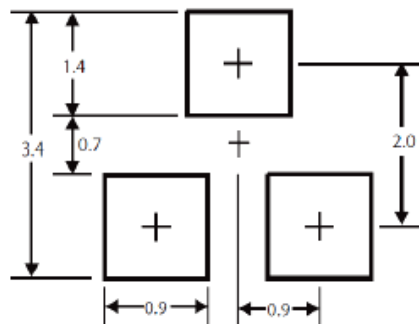

*Dimensions in millimeters