

RoHS Compliant Product
A suffix of "-C" specifies halogen and lead-free


DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in digital cameras, cellular phones, MP3 players and many other portable applications where board space is at a premium.

FEATURES

- Bi-directional ESD protection of one line
- Low capacitance
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection

MARKING



PACKAGE INFORMATION

Package	MPQ	Leader Size
DFN1006	10K	7 inch


ORDER INFORMATION

Part Number	Type
SBESD24C-C	Lead (Pb)-free and Halogen-free

ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted.)

Parameter	Symbol	Ratings	Unit
ESD per IEC 61000-4-2	Air	±30	kV
	Contact	±30	
JESD22-A114-B ESD Voltage	Per Human Body Model	±16	
	Machine Model	±0.4	
Peak Pulse Power @tp=8/20µs	P _{PP}	275	W
Peak Pulse Current @tp=8/20µs	I _{PP}	5	A
Maximum Lead Solder Temperature(10 Second Duration)	T _L	260	°C
Operating Junction and Storage Temperature Range	T _J , T _{STG}	150, -55~150	°C

DFN1006

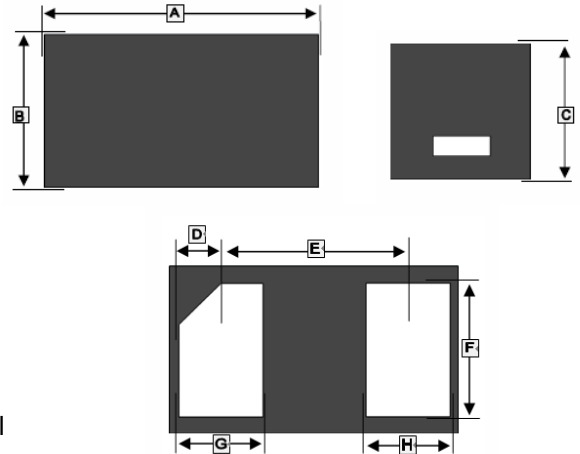

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.95	1.08	E	0.65BSC	
B	0.55	0.68	F	0.4	0.6
C	0.4	0.55	G	0.2	0.3
D	0.07	0.17	H	0.2	0.3



ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted.)


Parameter	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V_{RWM}	-	-	24	V
Reverse Breakdown Voltage @ $I_T=1\text{mA}$	V_{BR}	26.7	-	-	V
Reverse Leakage Current @ $V_{RWM}=24\text{V}$	I_R	-	-	0.2	μA
Clamping Voltage @ $I_{PP}=1\text{A}$	V_C	-	35	-	V
Junction Capacitance @ $V_R=0, f=1\text{MHz}$	C_J	-	20	-	pF

Note:

1. Device stressed with ten non-repetitive ESD pulses.

ELECTRICAL PARAMETER

Symbol	Parameter
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage

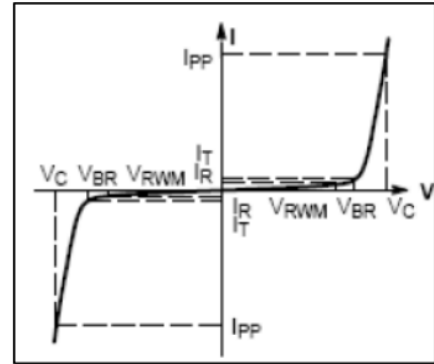

V-I characteristics for a Bi-directional TVS


ESD STANDARDS COMPLIANCE

IEC61000-4-2 Standard


Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard

ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

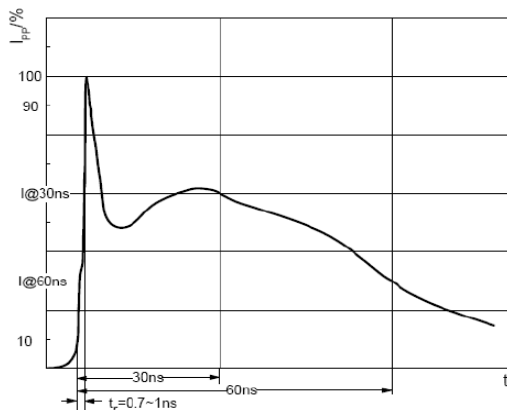


ESD pulse waveform according to IEC61000-4-2

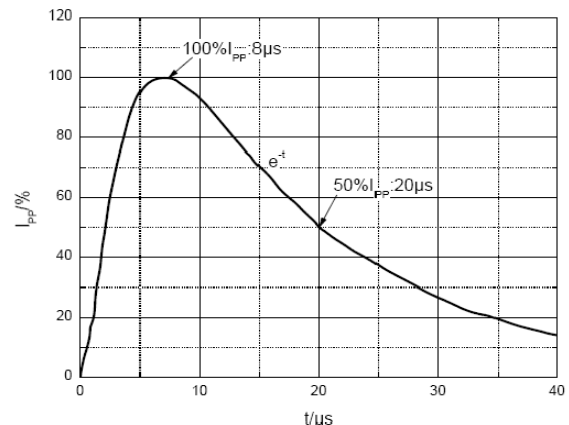


8/20µs pulse waveform according to IEC 61000-4-5

TYPICAL CHARACTERISTICS

Reverse Characteristics

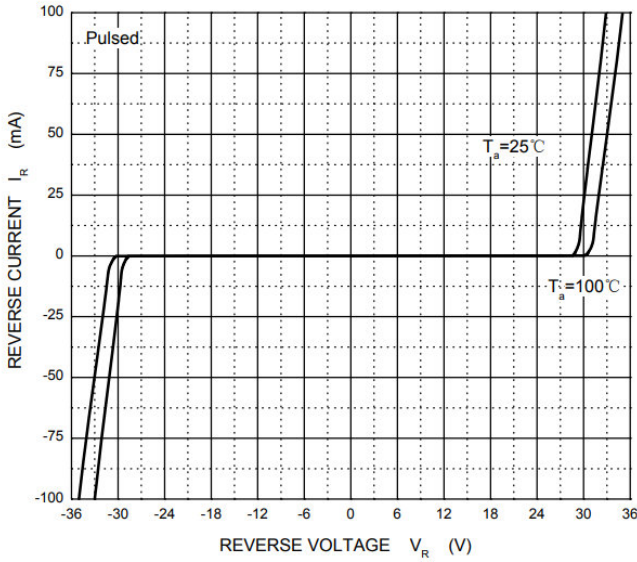

Capacitance Characteristics

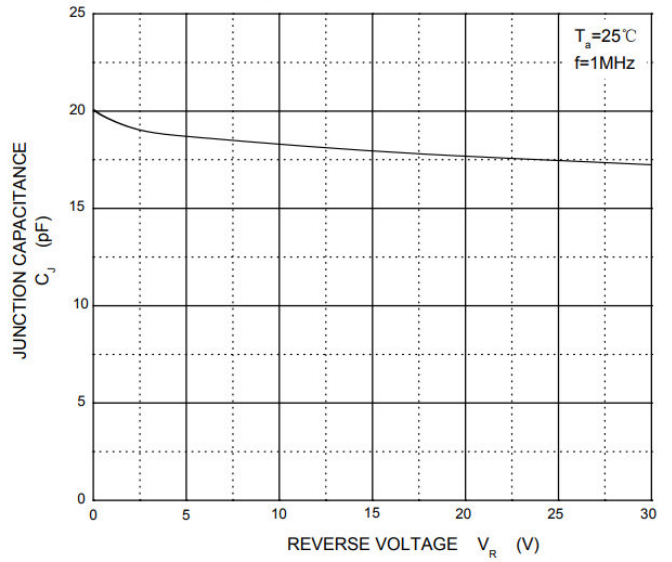

V_C — I_{PP}

